

> CH SERIES

注水回轉接頭 ROTARY UNION FOR HYDRAULIC

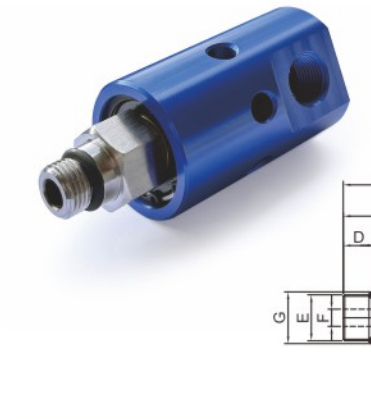

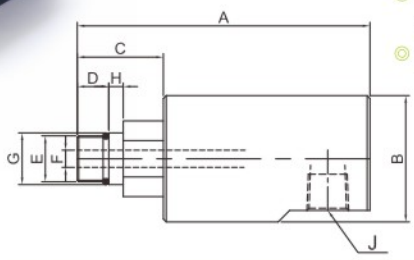

- 單通道閉合設計
- 軸承支撐，螺紋連接客户端，安裝便捷
- 耐腐蝕氧化鋁外殼
- 平衡機械密封，采用碳化硅密封
- Single passage and closed seals for transfer line.
- Bearing-supported with threaded rotor for easy installation
- Anodized aluminum housing and stainless steel rotor can resist corrosion.
- Balanced mechanical seals made from silicon carbide for long working life.


規格 Spec. 型號 Model	A	B	C	D	E	F	G	H	J	介質 Media	最高水壓 Max pressure	最高轉速 Max RPM Max	最高温度 Temperature	最大流量 Max Flow
CH-125-101	102	44	30	11	M16x1.5LH	9	18	5	G3/8	切削液 Coolant	8Mpa	12000	85	80L/min
CH-225-101	102	44	30	11	M16x1.5LH	9	18	5	G3/8		8Mpa	12000	85	80L/min

注意:CH-125-101單次連續斡連轉最長時間30分鐘，CH-225-101單次連續斡連轉最長時間50小時
Notes: CH-125-101 just can be allowed 30 minutes continuous working without media input.
CH-225-101canbeallowed 50 hours continuous workingwithout media input

> CA SERIES

注氣回轉接頭 ROTARY UNION FOR PNEUMATIC



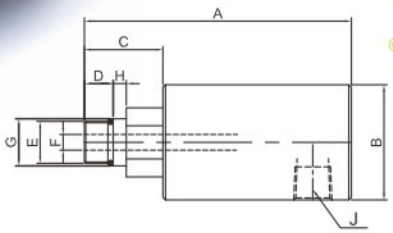

- 單通道設計，自支撐旋轉接頭
- 軸承支撐，螺紋連接客户端，安裝便捷
- 耐腐蝕氧化鋁外殼
- 平衡機械密封，采用碳化硅密封
- Single passage design,direct mounting and no need supporting additionally
- Bearing-supported with threaded rotor for easy in-stallation
- Anodized aluminum housing and stainless steel rotor can resist corrosion.
- Balanced mechanical seals made from silicon carbide for long working life.

規格 Spec. 型號 Model	A	B	C	D	E	F	G	H	J	介質 Media	最高氣壓 Max air pressure	最高轉速 Max RPM Max	最高温度 Temperature
CA-800-101	102	44	30	11	M16x1.5LH	6	18	5	RC3/8	氣體 Air	1Mpa	8000	85

* 保留技術更改的權利，恕不另行通知 Subject to technology changes without prior information
* 非標需求可訂做 Non-standard requirements can be made